Notes

1 Allow plus tolerance for clearance per ANSI A115.2.

2 Lock and latch case support by door manufacturer.

3 Plaster guard by door manufacturer.

4 Prepare for a #8–32 screw.

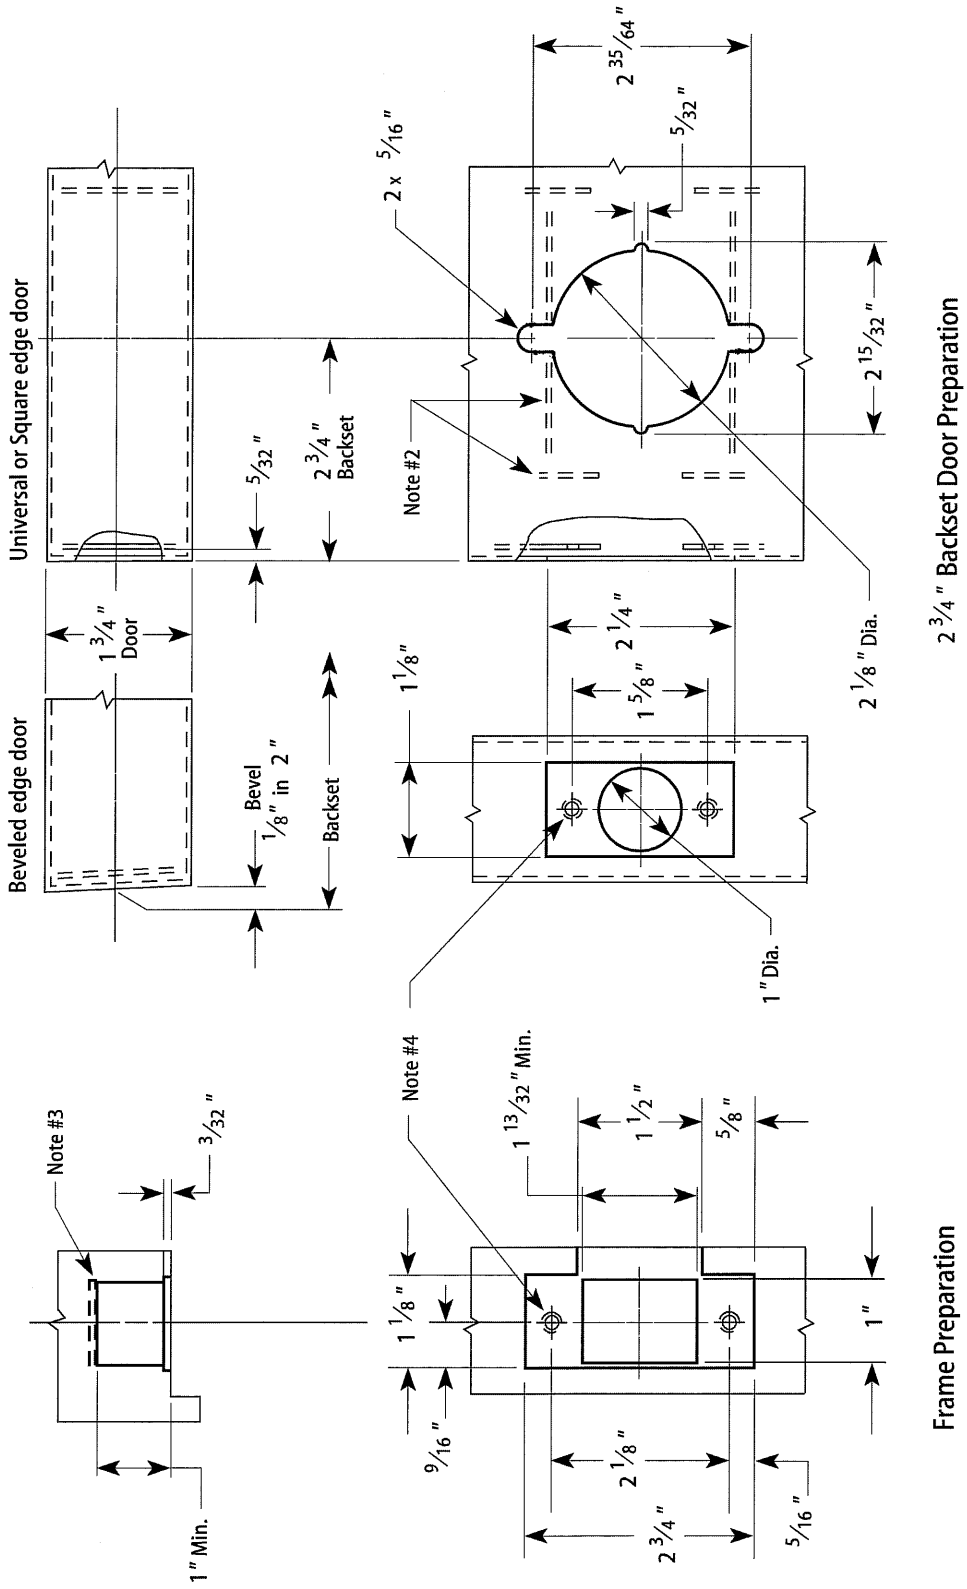

Door and Frame Preparation for MB1 and MB2 Cylindrical Locks
2-3/4" Backset, Small ANSI Strike (S2), 1-3/4" Door Thickness

Marshall Best Security Corporation