


720LM/DM










IMPORTANT:

It is highly recommended that you install the **cam/prong driver** and **lock cylinder** into the lock body and cycle to the locked position **before** assembling cam, cam shifter and stop pin onto the back of the lock.

Typical Installation







Lock diameter is 1-1/8". Drilled hole should be slightly larger.

Installation instructions for 720LM/DM series cam lock				
Series	Barrel Length	Bolt type	Mounting	Revision Date
720	1-7/16"	Cam lock	Surface	09/2014



720LM/DM

Assembled with vertical long cam 720-3-2 or extra long 3" cam 720-3-4



720-CDLMlost motion cam shifter (non-key-retaining)



720-KR key retaining drawer cam shifter




720-CDDM (A Side) key retaining door cam shifter



key retaining door cam shifter

IMPORTANT! If your cam has a brass pin between the two notched cut outs use these instructions, otherwise see page 3.

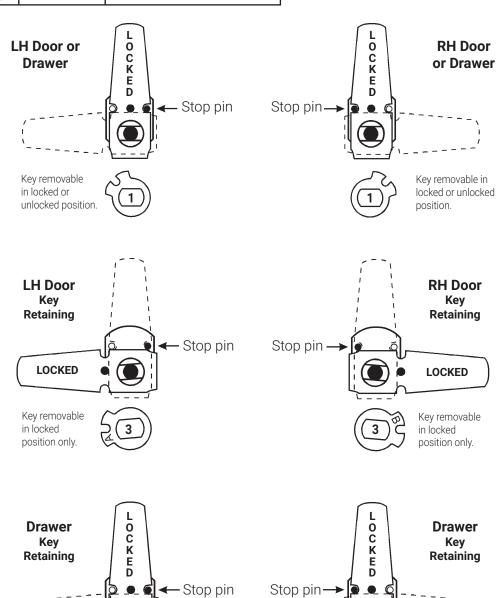



Key removable

position only.

in locked

Key removable

position only.

in locked

720LM/DM

Assembled with vertical long cam 720-3-2 or extra long 3" cam 720-3-4



(non-key-retaining)








720-KR key retaining drawer cam shifter

720-CDDM (A Side)
key retaining door
cam shifter
720-CDDM (B Side)
key retaining door
cam shifter

IMPORTANT! If your cam has a brass pin on the bottom of the cam use these instructions, otherwise see page 2.

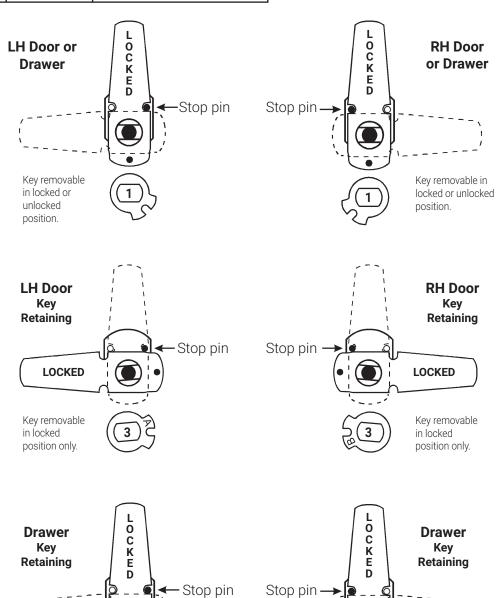



Key removable

position only.

in locked

Key removable


position only.

in locked

MARSHALL BEST SECURITY

720LM/DM

Assembled with short cam 720-3-1

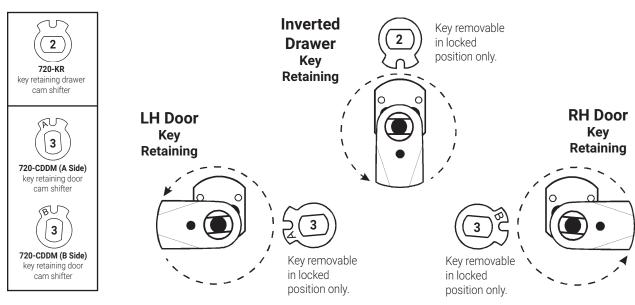

Assembled with inverted long cam 720-3-3 or 720-3-5

