




MKR Series Institutional Life Safety Mortise Lockset Trim Installation Instructions®

Lockset Trim Installation MKR Series:

1. Place **inside knob/rose assembly** through lock body so that spring-loaded spindle engages inside hub (on the diamond) and threaded posts extend to the outside.
2. Place **outside rose** on door and screw onto threaded posts.
3. Insert **outside knob** fully onto the outside rose, so that spring-loaded spindle engages the outside hub (on the diamond). Secure with two **set screws** in rose.

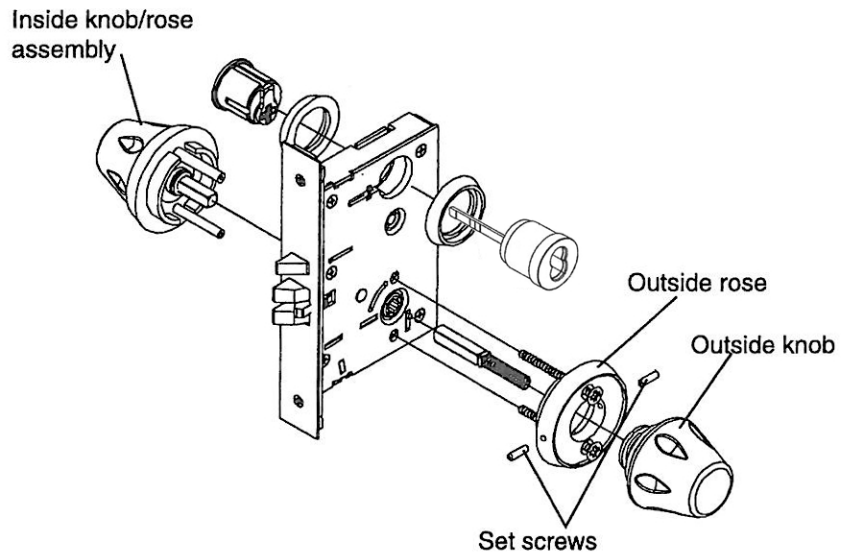

For Models With Deadbolts and Inside Turn Knob:

1. Place **turnpiece rose/spindle assembly** on door with spindle entering into deadbolt hub. Fasten **turnpiece rose/spindle assembly** to door with two screws. Make sure alignment is correct so that **turnpiece spindle** bushing can turn smoothly when throwing and retracting deadbolt.
2. With **turnpiece rose/spindle assembly** mounted in correct position, place **turn knob** fully over **turnpiece spindle** and secure with two **set screws** in turn knob.

NOTE: The above instruction assumes the secure trim to be on the inside. Depending upon application, this may be reversed.

