



Interconnected Lock



Interconnected Lock

ANSI Grade 2

Medium Duty

GF2 Series




Features

The GF2 Series interconnected locks bring together the functionality of the cylindrical locks with the security of the auxiliary deadbolt to merge into a complete product with added safety and security that meets a wide range of application needs. By a single action of turning the inside lever, the GF2 Series interconnected locks provide the simultaneous retraction of both deadbolt and latchbolt for immediate exit.

Ideal for use in medium and light duty commercial and residential applications, the GF2 Series provides a single action to engage both locksets to ensure a convenient and reliable operation. Once you've installed this product, you will know that you have made the right choice for your residential and commercial needs.

The GF2 Series locks have been designed with style yet maintaining the high-quality that our customers deserve. They have been tested and improved to meet the ANSI A156.12 performance requirements and UL/ULC listings.

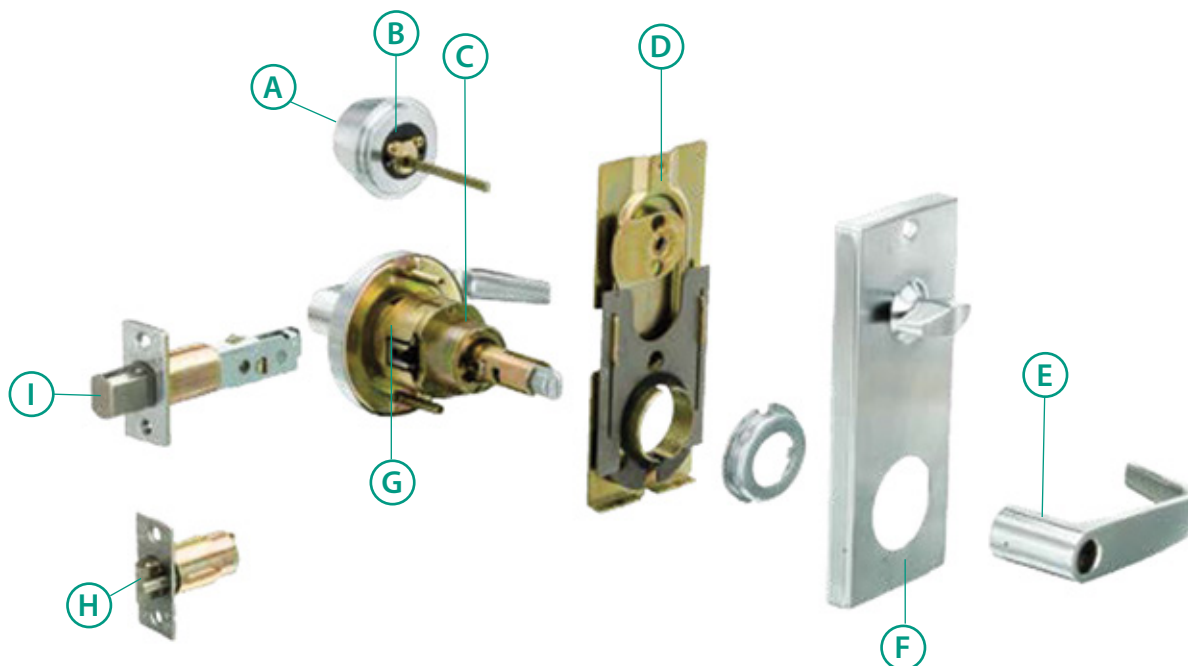

- A** Taper cylinder guard turns free with any removal attempt.
- B** High-strength steel cylinder housing that accepts most manufacturers' cylinders for added protection and durability.
- C** Independent return springs in both side hubs provide extra resistance to lever sagging.
- D** Linkage plate allows the simultaneous retraction of the latchbolt and the deadbolt.
- E** Different lever designs as well as a wide variety of finishes to match door applications.
- F** Inside escutcheon provides an aesthetically pleasant appearance by fully concealing the linkage plate.
- G** Internal mechanisms are corrosion treated for normal atmospheric conditions.
- H** UL/ULC listed 1/2" throw latchbolt designed with a smooth curved surface, thus reducing friction.
- I** 1" (25mm) throw high-strength stainless steel deadbolt resists sawing and kick-in attacks.

Out of an abundance of caution, MBS has elected to place the Proposition 65 warning on all products shipped to California.



WARNING: These products can expose you to chemicals including chromium, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.



Products





Specifications




Certification/Compliance	• UL and ULC listed for 3-hour "A" label single-door applications.
Backset	• 2-3/4" (70mm) standard, 2-3/8" (60mm) available.
Door Thickness	• Standard 1-3/8" to 2" wood or metal door.
Deadbolt	• 1" throw, made from high-strength stainless steel.
Latchbolt	• 1/2" throw, UL/ULC listed. 2-1/4" x 1-1/8" faceplate for 2-3/4" back set; 2-1/4" x 1" faceplate for 2-3/8" backset.
Inside Escutcheon	• 3" x 7-1/2" (81.5mm x 190.5mm).
Handing	• Non-handed.
Strike	• ANSI strike standard, T-strike or full-lip strike optional.
Cylinder	• 6-pin "C" keyway standard, nickel silver keys, compatible with Schlage®.
I/C Core	• 6 or 7-pin, compatible with Best® and Falcon®.
Keys	• Two white nickel silver keys.
Trim	• Solid zinc diecast levers, wrought brass roses, concealed screws.
Master Keying	• Can be masterkeyed or grand masterkeyed. Construction key systems available.
Finishes	• 605,606,612,613,625,626
Warranty	• SEVEN (7) YEAR manufacturer's limited warranty.





Finishes

A wide selection of finishes are available to match with your door and other hardware.

Color		ANSI
	Polished Brass	605
	Satin Brass	606
	Satin Bronze	612

Color		ANSI
	Dark Oxidized Satin Bronze	613
	Polished Chrome	625
	Satin Chrome	626

Functions

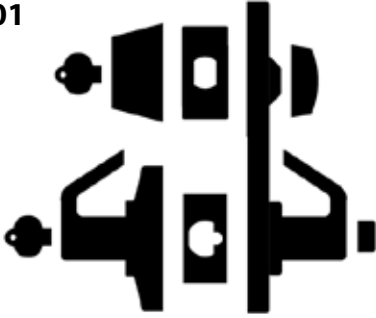Function Code Number	Description	ANSI
01 	Entry Lock - Double Locking <ul style="list-style-type: none"> • Deadbolt thrown or retracted by key from outside or inside thumbturn. • Deadlocking latchbolt retracted by key from outside when locked by push button from inside. • Turning inside lever simultaneously retracts both deadbolt and latchbolt. 	F96
30 	Entry Lock - Single Locking <ul style="list-style-type: none"> • Deadbolt thrown or retracted by key from outside or inside thumbturn. • Latchbolt operated by lever from either side. • Turning inside lever simultaneously retracts both deadbolt and latchbolt. 	F95

How To Order

Model Series	Backset	Function Code	Lever Handle	Finish	Strike
GF2	3	01	#14	626	S1
GF2 I/C CORE	2 - 2-3/8"	See Function Chart	#14	605	S1 - ANSI Strike
GF2S Schlage C	3 - 2-3/4"		#15	606	S2 - T Strike
			#16	612	
				613	
				625	
				626	

Miscellaneous

Trim



14 Style



15 Style



16 Style

Cylinders



Standard Cylinder



SFIC I/C Core

Latches



Deadlatch
1/2" projection, 2-3/4" backset
2-1/4" X 1-1/8"



Springlatch
1/2" projection, 2-3/4" backset
2-1/4" X 1-1/8"



Deadbolt
1" projection, 2-3/4" backset
2-1/4" X 1-1/8"


Strikes



D27
ANSI Strike
4-7/8" x 1-1/4"
1-3/16" lip length



B27
T-Strike
2-3/4" x 1-1/8"
1-1/8" lip length



T27(T5)
Square Corner
Deadbolt Strike
2-3/4" x 1-1/8"



Marshall Best Security Corporation

www.MarshallBestSecurity.com

10005 Cumberland Pointe Blvd. • Noblesville, Indiana 46060

317-806-1180 • F: 317-578-2901